


Deep Blue Delay

Ver-2.1

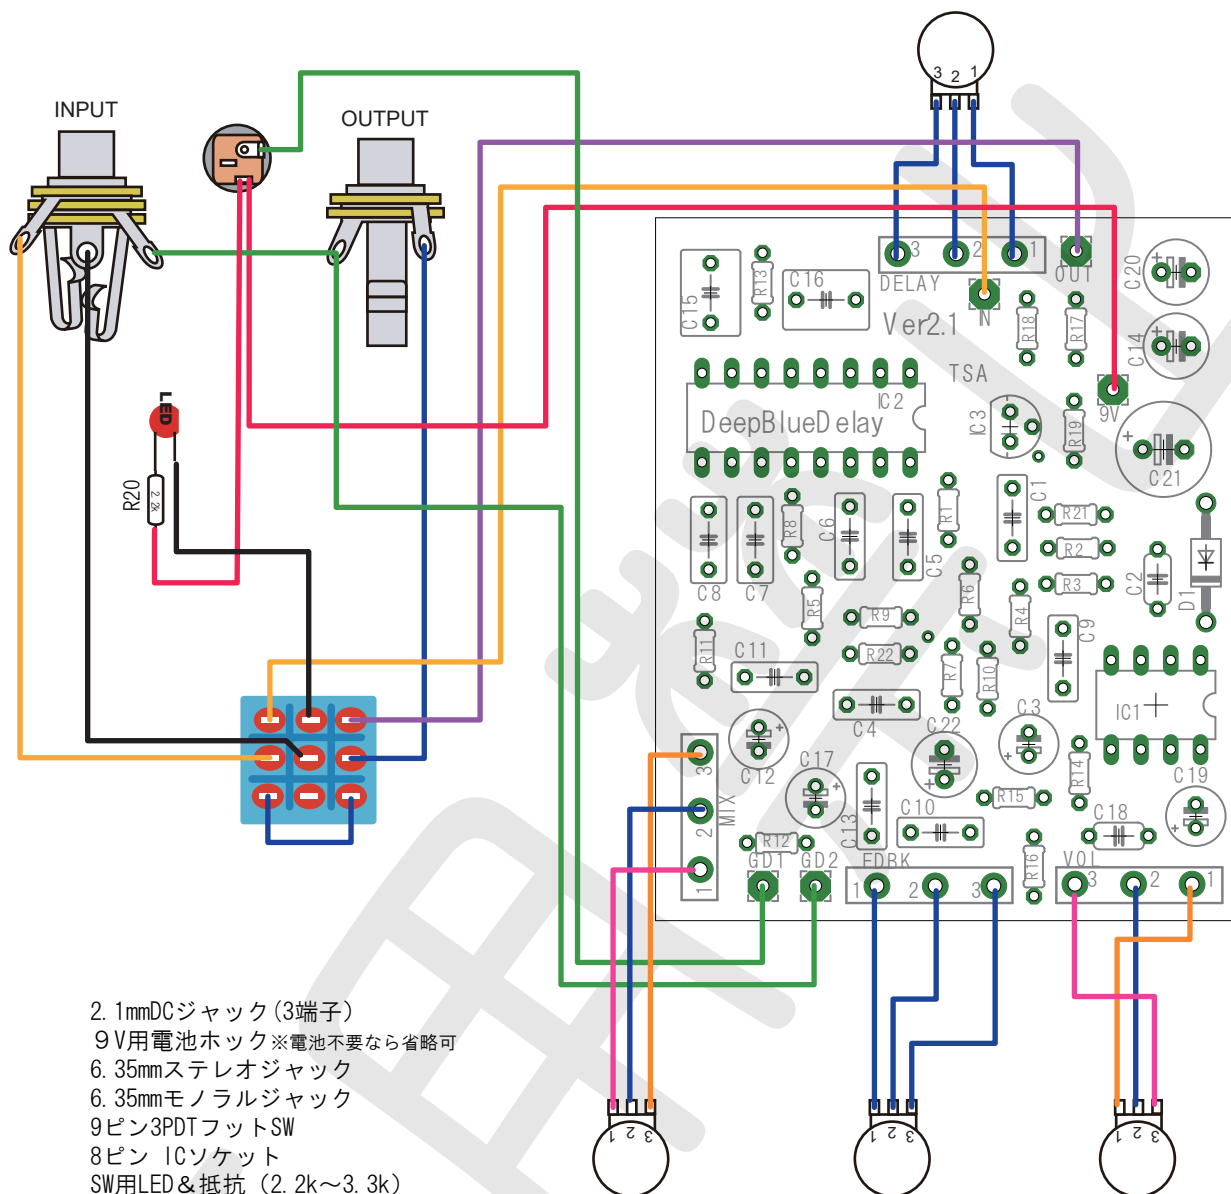

2. 1mmDCジャック (3端子)
9V用電池ホック※電池不要なら省略可
6. 35mmステレオジャック
6. 35mmモノラルジャック
9ピン3PDTフットSW
8ピン ICソケット
SW用LED&抵抗 (2. 2k~3. 3k)

C1	0.022u	C13	0.047u	R1	1M	R13	10k	D1	1N4001
C2	47p	C14	47u (電解)	R2	180k	R14	22k	DELAY	50kB
C3	1u (電解)	C15	0.1u	R3	360k	R15	20k	FDBK	50kB
C4	0.0047u	C16	0.1u	R4	10k	R16	12k	IC1	TL072CP
C5	0.002u	C17	1u (電解)	R5	10k	R17	1k	IC2	PT2399
C6	0.002u	C18	100p	R6	10k	R18	100k	IC3	78L05
C7	0.1u	C19	1u (電解)	R7	10k	R19	33R	MIX	50kB
C8	0.1u	C20	47u (電解)	R8	10k	R20	2. 2k ~ 3. 3k	VOL	25kB
C9	0.015u	C21	100u (電解)	R9	20k	R21	10k		
C10	0.022u	C22	47u (電解)	R10	5. 1k	R22	10k		
C11	0.01u			R11	1k				
C12	1u (電解)			R12	2k				

音色研究会