


PeteCornish GC-1 配線図 (Ver3.0)

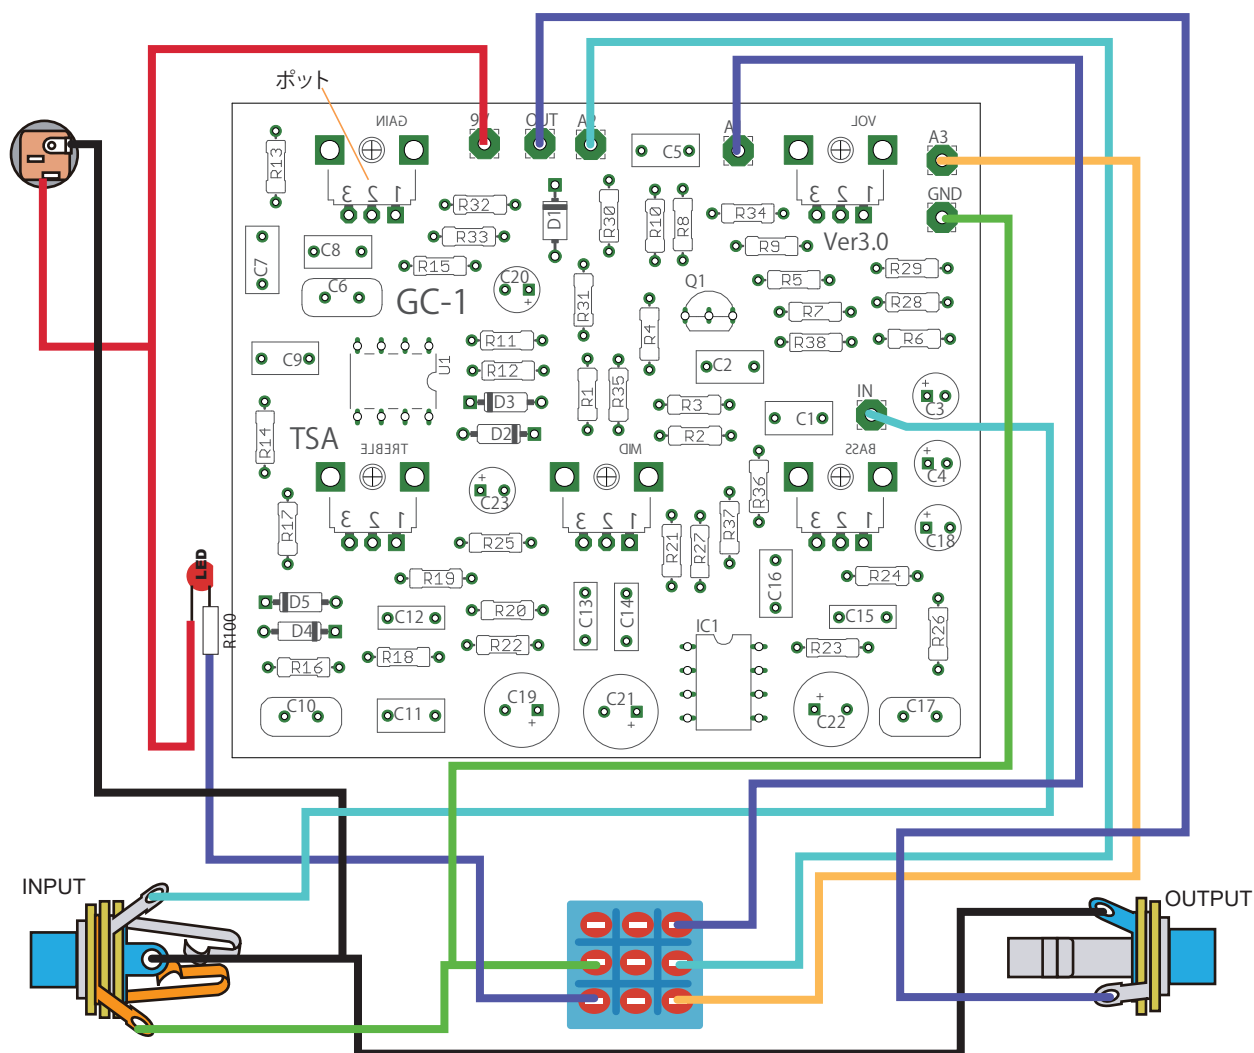

パーツリスト

R1	10M	R21	3.3k	C1	0.1u	D1	1N5401	2.1mmDCジャック(3端子)
R2	1k	R22	11k	C2	0.1u	D2	1N914	
R3	120k	R23	11k	C3	4.7u	D3	1N914	6.35mmステレオジャック
R4	120k	R24	11k	C4	22u	D4	1N914	6.35mmモノラルジャック
R5	200k	R25	10k	C5	0.1u	D5	1N914	8ピン ICソケット×2
R6	7.5k	R26	1M	C6	470p	GAIN	10kC	ボットのつまみ×5
R7	10k	R27	51R	C7	1u	BASS	100kB	
R8	51R	R28	10k	C8	0.022u	MID	100kB	エフェクター基板 エフェクターケース 3PDTフットSW LEDとLEDブラケット R100 2~4k (SWのLED抵抗)
R9	10M	R29	51R	C9	0.47u	TREBLE	100kB	
R10	1M	R30	91R	C10	470p	VOL	10kA	
R11	150k	R31	51k	C11	1u			
R12	1k	R32	100R	C12	0.01u	IC1	TL071CP	
R13	470R	R33	10k	C13	0.0033u	Q1	BC549C	
R14	15k	R34	10k	C14	0.022u	U1	TL072CP	
R15	22k	R35	100R	C15	0.01u			
R16	47k	R36	100R	C16	1u			
R17	39k	R37	10k	C17	470p			
R18	1.8k	R38	10k	C18	22u			
R19	1.8k			C19	220u			
R20	3.3k			C20	22u			
				C21	220u			
				C22	220u			
				C23	22u			

音色研究会