


Diezel VH4 配線図 (Ver3.0)

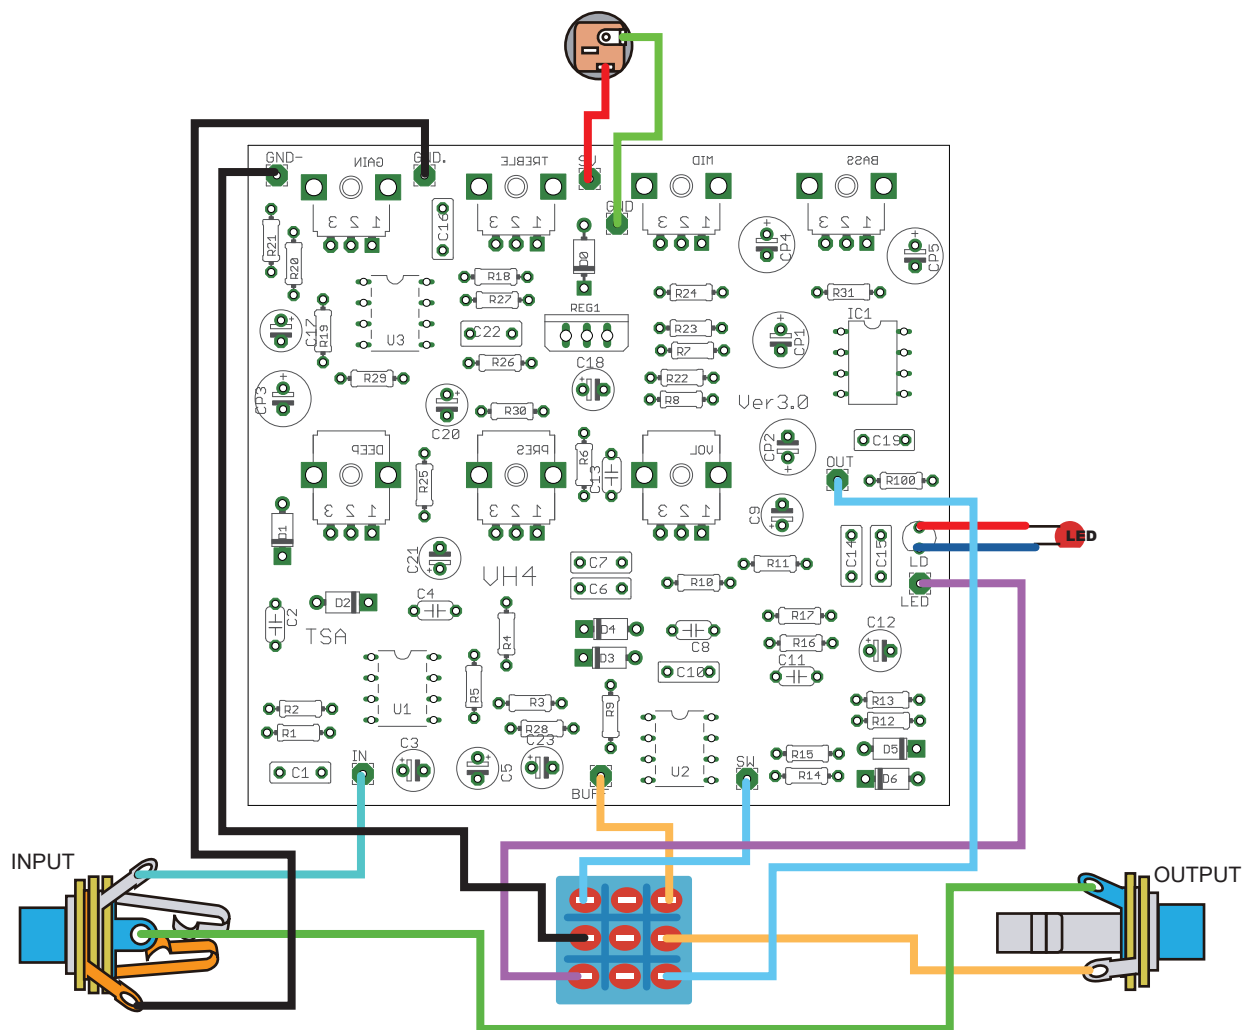

パーツリスト

R1	1M	R24	100k	C1	0.022u	CP1	47u	REG1	LM2940CT-12
R2	1M	R25	100R	C2	100p	CP2	47u	IC1	TC1044SCPA
R3	100k	R26	56k	C3	1u	CP3	47u	U1	OPA2134
R4	220k	R27	47R	C4	100p	CP4	47u	U2	OPA2134
R5	10k	R28	100k	C5	1u	CP5	47u	U3	TL072CP
R6	470k	R29	10R	C6	0.022u	D0	1N5817		
R7	220k	R30	110R	C7	0.0022u	D1	1N4148		
R8	680k	R31	10R	C8	47p	D2	1N4148		2.1mmDCジャック(3端子)
R9	220k	R100	3k	C9	2.2u	D3	1N5232		6.35mmステレオジャック
R10	1M			C10	0.0047u	D4	1N5232		6.35mmモノラルジャック
R11	10k			C11	100p	D5	1N4148		8ピン ICソケット × 4
R12	100k			C12	2.2u	D6	1N4148		ポットのつまみ × 7
R13	470k	DEEP	25kC	C13	560p				
R14	220k	PRES	25kC	C14	0.022u				VH4基板
R15	220k	GAIN	250kA	C15	0.022u				エフェクターケース
R16	10k	BASS	1MB	C16	0.001u				3PDTフットSW
R17	39k	MID	25kB	C17	10u				LEDとLEDブラケット
R18	1.5M	TREBLE	250kB	C18	10u				
R19	100k	VOL	10kA	C19	0.0022u				
R20	10k			C20	2.2u				
R21	4.7k			C21	1u				
R22	110R			C22	0.33u				
R23	150k			C23	1u				

音色研究会